PLAN SHOWING RESIDENTIAL SUBPLOTTING ON CITY SURVEY NO - NA 258 PAIKI 2 VILLAGE - AAKRU , TAL - DHANDHUKA , DIST - AHMEDABAD

SCALE :- 1.0 CM = 5.0 MT	SHEET NO - 1/1
ZONE :- -------	USE :- RESIDENTIAL(DW2)
AREA TABLE	SQMT
AREA OF CITY SURVEY NO - NA 258 PAIKI 2	18832.00
AREA GOING IN ROAD	161.35
NET PLOT AREA	18670.65
REQUIRED COMMON PLOT (10%)	1883.20
PROVIDED COMMON PLOT	1888.17
TOTAL SUB PLOT AREA	10276.46
PROPOSED BUILTUP AREA ON GROUND FLOOR	1359.75
TOTAL PROVIDED BUILTUP AREA ON ALL FLOORS	1359.75
F.S.I. AREA TABLE	
PERMISSIBLE F.S.I. (1:1.2 - 10276.46X1.2)	12331.75
PROVIDED F.S.I. AT GROUND FLOOR	1359.75
BALANCE PERMISSIBLE FSI	10972.00
TREE PLANTATION CALCULATION	
REQUIRED = 18832.00 * 5) / 200 = 470.80 SAY 471	471 NOS.
PROVIDED = 471 NOS.	471 NOS.
PERCOLATING WELL CALCULATION	
REQUIRED =18832.00 / 4000 = 4.70 NOS. , SAY = 5 NOS.	5 NOS.
PROVIDED =5 NOS.	5 NOS.

COLOUR NOTE :-
- PLOT BOUNDRY
- PROPOSED BUILTUP
- COMMON PLOT
- ROAD
- PARKING
- P.W.

NOTE :-
MT = METER
ADJ = ADJACENT
Ⓐ-Ⓑ = CROSS OVER ROAD
O.S. = OPEN SPACE
ALL DIMENSIONSA ARE IN METER

OWNER'S NAME & SIGNATURE

ENGINEER

SAGAR M JOSHI
(Consulting Civil Engineer)
AHMEDABAD
LIC.NO:-1114ERH06073001062

ST ENGINEER

BHAVSAR PRIYA KETANKUMAR
S.T.ENGINEER GRADE - II
AUDA LIC NO- 1114SE0701271107
AHMEDABAD

AUTHORITY

ENGINEER CERTIFICATE

CERTIFIED THAT THE PLOT UNDER REFERENCE WAS SURVEYED BY ME ON 15/07/2025 AND THE DIMENSION OF THE SIDES ETC OF PLOT STATED ON PLAN AREA AS MEASURED BY ME ON SITE AND THE AREA SO WORKED OUT TALLIES WITH THE AREA STATED IN DOCUMENT OF OWNERSHIP.

SAGAR M JOSHI
(Consulting Civil Engineer)
AHMEDABAD
LIC.NO:-1114ERH06073001062

ENGINEER

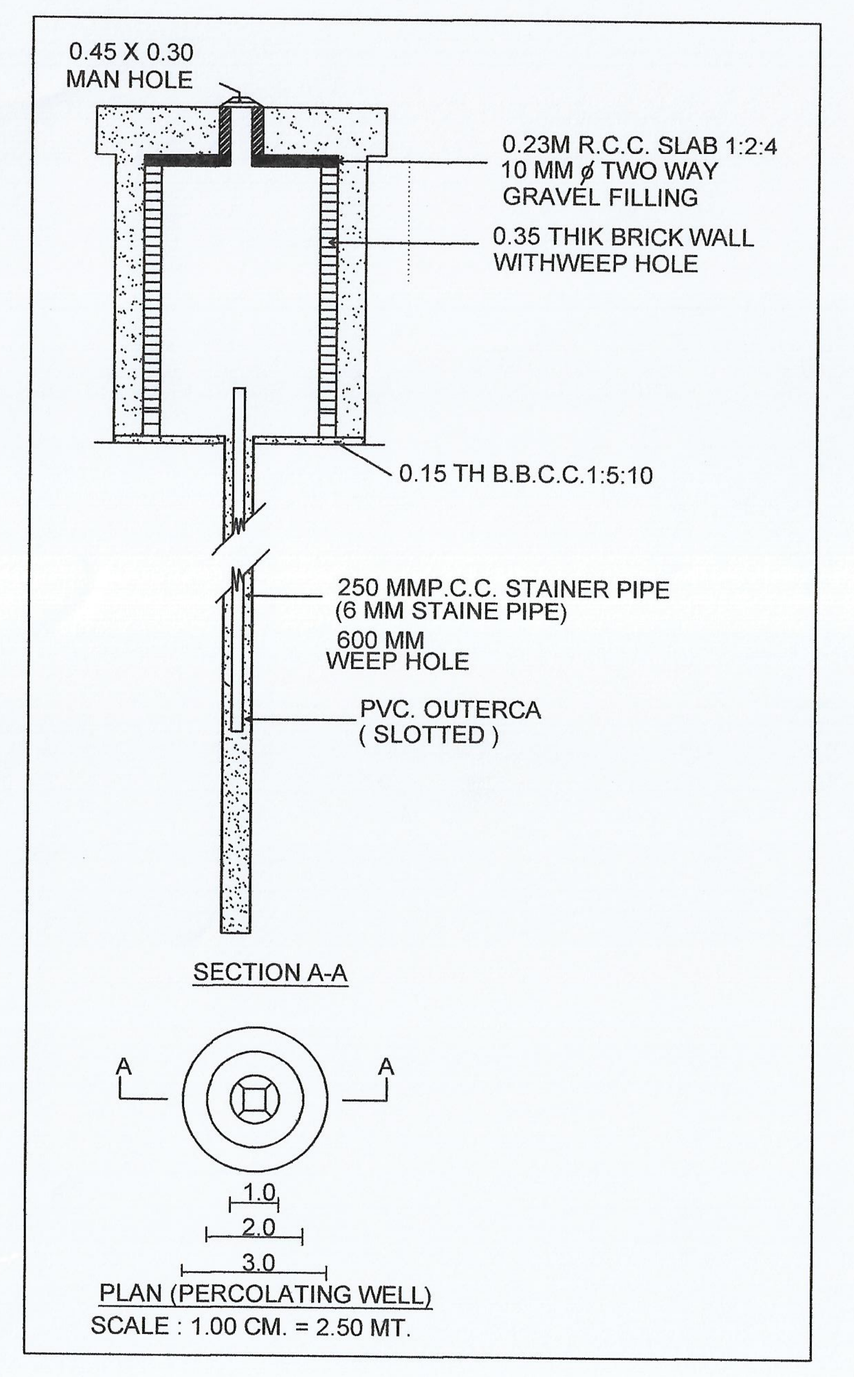

COMMON PLOT AREA CALCULATION :-

REQUIRED COMMON PLOT @ 10 % of 18832.00 = 1883.20 sqmt
PROVIDED COMMON PLOT = 1888.17 sqmt
(1298.03+590.14 = 1888.17 sqmt)

COMMON PLOT 1 :-
½ (7.22+32.30)x65.69 = 1298.03

COMMON PLOT 2 :-
½ (17.00+16.72) X 35.72 = 602.23
LESS CURVE :-
0.215 X 06.0 X 06.0 X 1 = 7.74
0.215 X 04.5 X 04.5 X 1 = 4.35
TOTAL = 12.09
(602.23 - 12.09 = 590.14 SQMT)

SUB PLOT AREA CALCULATION

SP NO	NO OF PLOTS	SIZE	SQMT
1	1	½ (18.60+18.34)x11.62=214.62	214.62
2	1	½ (18.34+18.19)x06.71=122.56	122.56
3	1	½ (18.19+18.04)x06.71=121.55	121.55
4	1	½ (18.04+17.89)x06.71=120.55	120.55
5	1	½ (17.89+17.74)x06.71=119.54	119.54
6	1	½ (17.74+17.60)x06.71=118.57	118.57
7	1	½ (17.60+17.45)x06.71=117.59	117.59
8	1	½ (17.45+17.30)x06.71=116.59	116.59
9	1	½ (17.30+17.15)x06.71=115.58	115.58
10	1	½ (17.15+17.00)x06.71=114.57	114.57
11	1	½ (17.00+16.85)x06.71=113.57	113.57
12	1	½ (16.85+16.68)x07.62=127.75	127.75
13	1	½ (15.58+15.64)X07.62=118.95 LESS CURVE :- 0.215X6.00X6.00X1=7.74 TOTAL =111.21	111.21
14	1	½ (15.58+15.50)x06.71=104.27	104.27
15	1	½ (15.50+15.43)x06.71=103.77	103.77
16	1	½ (15.43+15.36)x06.71=103.30	103.30
17	1	½ (15.36+15.28)x06.71=102.79	102.79
18	1	½ (15.28+15.21)x06.71=102.29	102.29
19	1	½ (15.21+15.14)x06.71=101.82	101.82
20	1	½ (15.14+15.06)x06.71=101.32	101.32
21	1	½ (15.06+14.99)x06.71=100.81	100.82
22	1	½ (14.99+14.92)x06.71=100.35	100.35
22	1	½ (14.92+14.85)x06.71=99.88	99.88
24	1	½ (14.78+14.85)x07.62=112.89 LESS CURVE :- 0.215X6.00X6.00X1=7.74 TOTAL =105.15	105.15
25	1	½ (14.58+14.66)x07.62=111.40 LESS CURVE :- 0.215X6.00X6.00X1=7.74 TOTAL =103.66	103.66
26	1	½ (14.58+14.51)x06.71=97.60	97.60
27	1	½ (14.51+14.43)x06.71=97.09	97.09
28	1	½ (14.43+14.36)x06.71=96.59	96.59
29	1	½ (14.36+14.29)x06.71=96.12	96.12
30	1	½ (14.29+14.22)x06.71=95.65	95.65
31	1	½ (14.22+14.14)x06.71=95.15	95.15
32	1	½ (14.14+14.07)x06.71=94.64	94.64
33	1	½ (14.07+14.00)x06.71=94.17	94.17
34	1	½ (14.00+13.92)x06.71=93.67	93.67
35	1	½ (13.92+13.85)x06.71=93.17	93.17
36	1	½ (13.85+13.77)x07.62=105.23	105.23
37	1	12.20x07.62=92.96	92.96
38 TO 47	10	12.20x06.71=81.86x10=818.60	818.60
48,49,60	3	12.20x07.62=92.96 LESS CURVE :- 0.215X4.50X4.50X1=4.35 TOTAL =88.61 88.61x3=265.83	265.83
50 TO 59	10	12.20x06.71=81.86x10=818.60	818.60
61	1	12.20x7.62=92.96	92.96
62 TO 71	10	12.20x06.71=81.86x10=818.60	818.60
72	1	12.20x11.62=114.76	114.76
73	1	12.20x12.51=152.62	152.62
74 TO 86	13	12.20x06.71=81.86x13=1064.18	1064.18
87,88	2	12.20x07.62=92.96 LESS CURVE :- 0.215X4.50X4.50X1=4.35 TOTAL =88.61 88.61x2=177.22	177.22
89 TO 98	10	12.20x06.71=81.86x10=818.60	818.60
99,100	2	12.20x07.62=92.96 LESS CURVE :- 0.215X4.50X4.50X1=4.35 TOTAL =88.61 88.61x2=177.22	177.22
101 to 110	10	12.20x06.71=81.86x10=818.60	818.60
111	1	12.20x07.62=92.96	92.96
TOTAL	111		10276.46

SUB PLOT NO	SUB PLOT AREA	PERMISSIBLE F.S.I.(1.2)	BUILTUP & USED	BALANCE F.S.I.
1	214.62	257.54	12.25	245.29
2	122.56	147.07	12.25	134.82
3	121.55	145.86	12.25	133.61
4	120.55	144.66	12.25	132.41
5	119.54	143.45	12.25	131.20
6	118.57	142.28	12.25	130.03
7	117.59	141.11	12.25	128.86
8	116.59	139.91	12.25	127.66
9	115.58	138.70	12.25	126.45
10	114.57	137.48	12.25	125.23
11	113.57	136.28	12.25	124.03
12	127.75	153.30	12.25	141.05
13	111.21	133.45	12.25	121.20
14	104.27	125.12	12.25	112.87
15	103.77	124.52	12.25	112.27
16	103.3	123.96	12.25	111.71
17	102.79	123.35	12.25	111.10
18	102.29	122.75	12.25	110.50
19	101.82	122.18	12.25	109.93
20	101.32	121.58	12.25	109.33
21	100.82	120.98	12.25	108.73
22	100.35	120.42	12.25	108.17
23	99.88	119.86	12.25	107.61
24	105.15	126.18	12.25	113.93
25	103.66	124.39	12.25	112.14
26	97.6	117.12	12.25	104.87
27	97.09	116.51	12.25	104.26
28	96.59	115.91	12.25	103.66
29	96.12	115.34	12.25	103.09
30	95.65	114.78	12.25	102.53
31	95.15	114.18	12.25	101.93
32	94.64	113.57	12.25	101.32
33	94.17	113.00	12.25	100.75
34	93.67	112.40	12.25	100.15
35	93.17	111.80	12.25	99.55
36	105.23	126.28	12.25	114.03
37	92.96	111.55	12.25	99.30
38	81.86	98.23	12.25	85.98
39	81.86	98.23	12.25	85.98
40	81.86	98.23	12.25	85.98
41	81.86	98.23	12.25	85.98
42	81.86	98.23	12.25	85.98
43	81.86	98.23	12.25	85.98
44	81.86	98.23	12.25	85.98
45	81.86	98.23	12.25	85.98
46	81.86	98.23	12.25	85.98
47	81.86	98.23	12.25	85.98
48	88.61	106.33	12.25	94.08
49	88.61	106.33	12.25	94.08
50	81.86	98.23	12.25	85.98
51	81.86	98.23	12.25	85.98
52	81.86	98.23	12.25	85.98
53	81.86	98.23	12.25	85.98
54	81.86	98.23	12.25	85.98
55	81.86	98.23	12.25	85.98
56	81.86	98.23	12.25	85.98

SUB PLOT NO	SUB PLOT AREA	PERMISSIBLE F.S.I.(1.2)	BUILTUP & USED	BALANCE F.S.I.
57	81.86	98.23	12.25	85.98
58	81.86	98.23	12.25	85.98
59	81.86	98.23	12.25	85.98
60	88.61	106.33	12.25	94.08
61	92.96	111.55	12.25	99.30
62	81.86	98.23	12.25	85.98
63	81.86	98.23	12.25	85.98
64	81.86	98.23	12.25	85.98
65	81.86	98.23	12.25	85.98
66	81.86	98.23	12.25	85.98
67	81.86	98.23	12.25	85.98
68	81.86	98.23	12.25	85.98
69	81.86	98.23	12.25	85.98
70	81.86	98.23	12.25	85.98
71	81.86	98.23	12.25	85.98
72	144.76	173.71	12.25	161.46
73	152.62	183.14	12.25	170.89
74	81.86	98.23	12.25	85.98
75	81.86	98.23	12.25	85.98
76	81.86	98.23	12.25	85.98
77	81.86	98.23	12.25	85.98
78	81.86	98.23	12.25	85.98
79	81.86	98.23	12.25	85.98
80	81.86	98.23	12.25	85.98
81	81.86	98.23	12.25	85.98
82	81.86	98.23	12.25	85.98
83	81.86	98.23	12.25	85.98
84	81.86	98.23	12.25	85.98
85	81.86	98.23	12.25	85.98
86	81.86	98.23	12.25	85.98
87	88.61	106.33	12.25	94.08
88	88.61	106.33	12.25	94.08
89	81.86	98.23	12.25	85.98
90	81.86	98.23	12.25	85.98
91	81.86	98.23	12.25	85.98
92	81.86	98.23	12.25	85.98
93	81.86	98.23	12.25	85.98
94	81.86	98.23	12.25	85.98
95	81.86	98.23	12.25	85.98
96	81.86	98.23	12.25	85.98
97	81.86	98.23	12.25	85.98
98	81.86	98.23	12.25	85.98
99	88.61	106.33	12.25	94.08
100	88.61	106.33	12.25	94.08
101	81.86	98.23	12.25	85.98
102	81.86	98.23	12.25	85.98
103	81.86	98.23	12.25	85.98
104	81.86	98.23	12.25	85.98
105	81.86	98.23	12.25	85.98
106	81.86	98.23	12.25	85.98
107	81.86	98.23	12.25	85.98
108	81.86	98.23	12.25	85.98
109	81.86	98.23	12.25	85.98
110	81.86	98.23	12.25	85.98
111	92.96	111.55	12.25	99.30
TOTAL	10276.46	12331.75	1359.75	10972.00

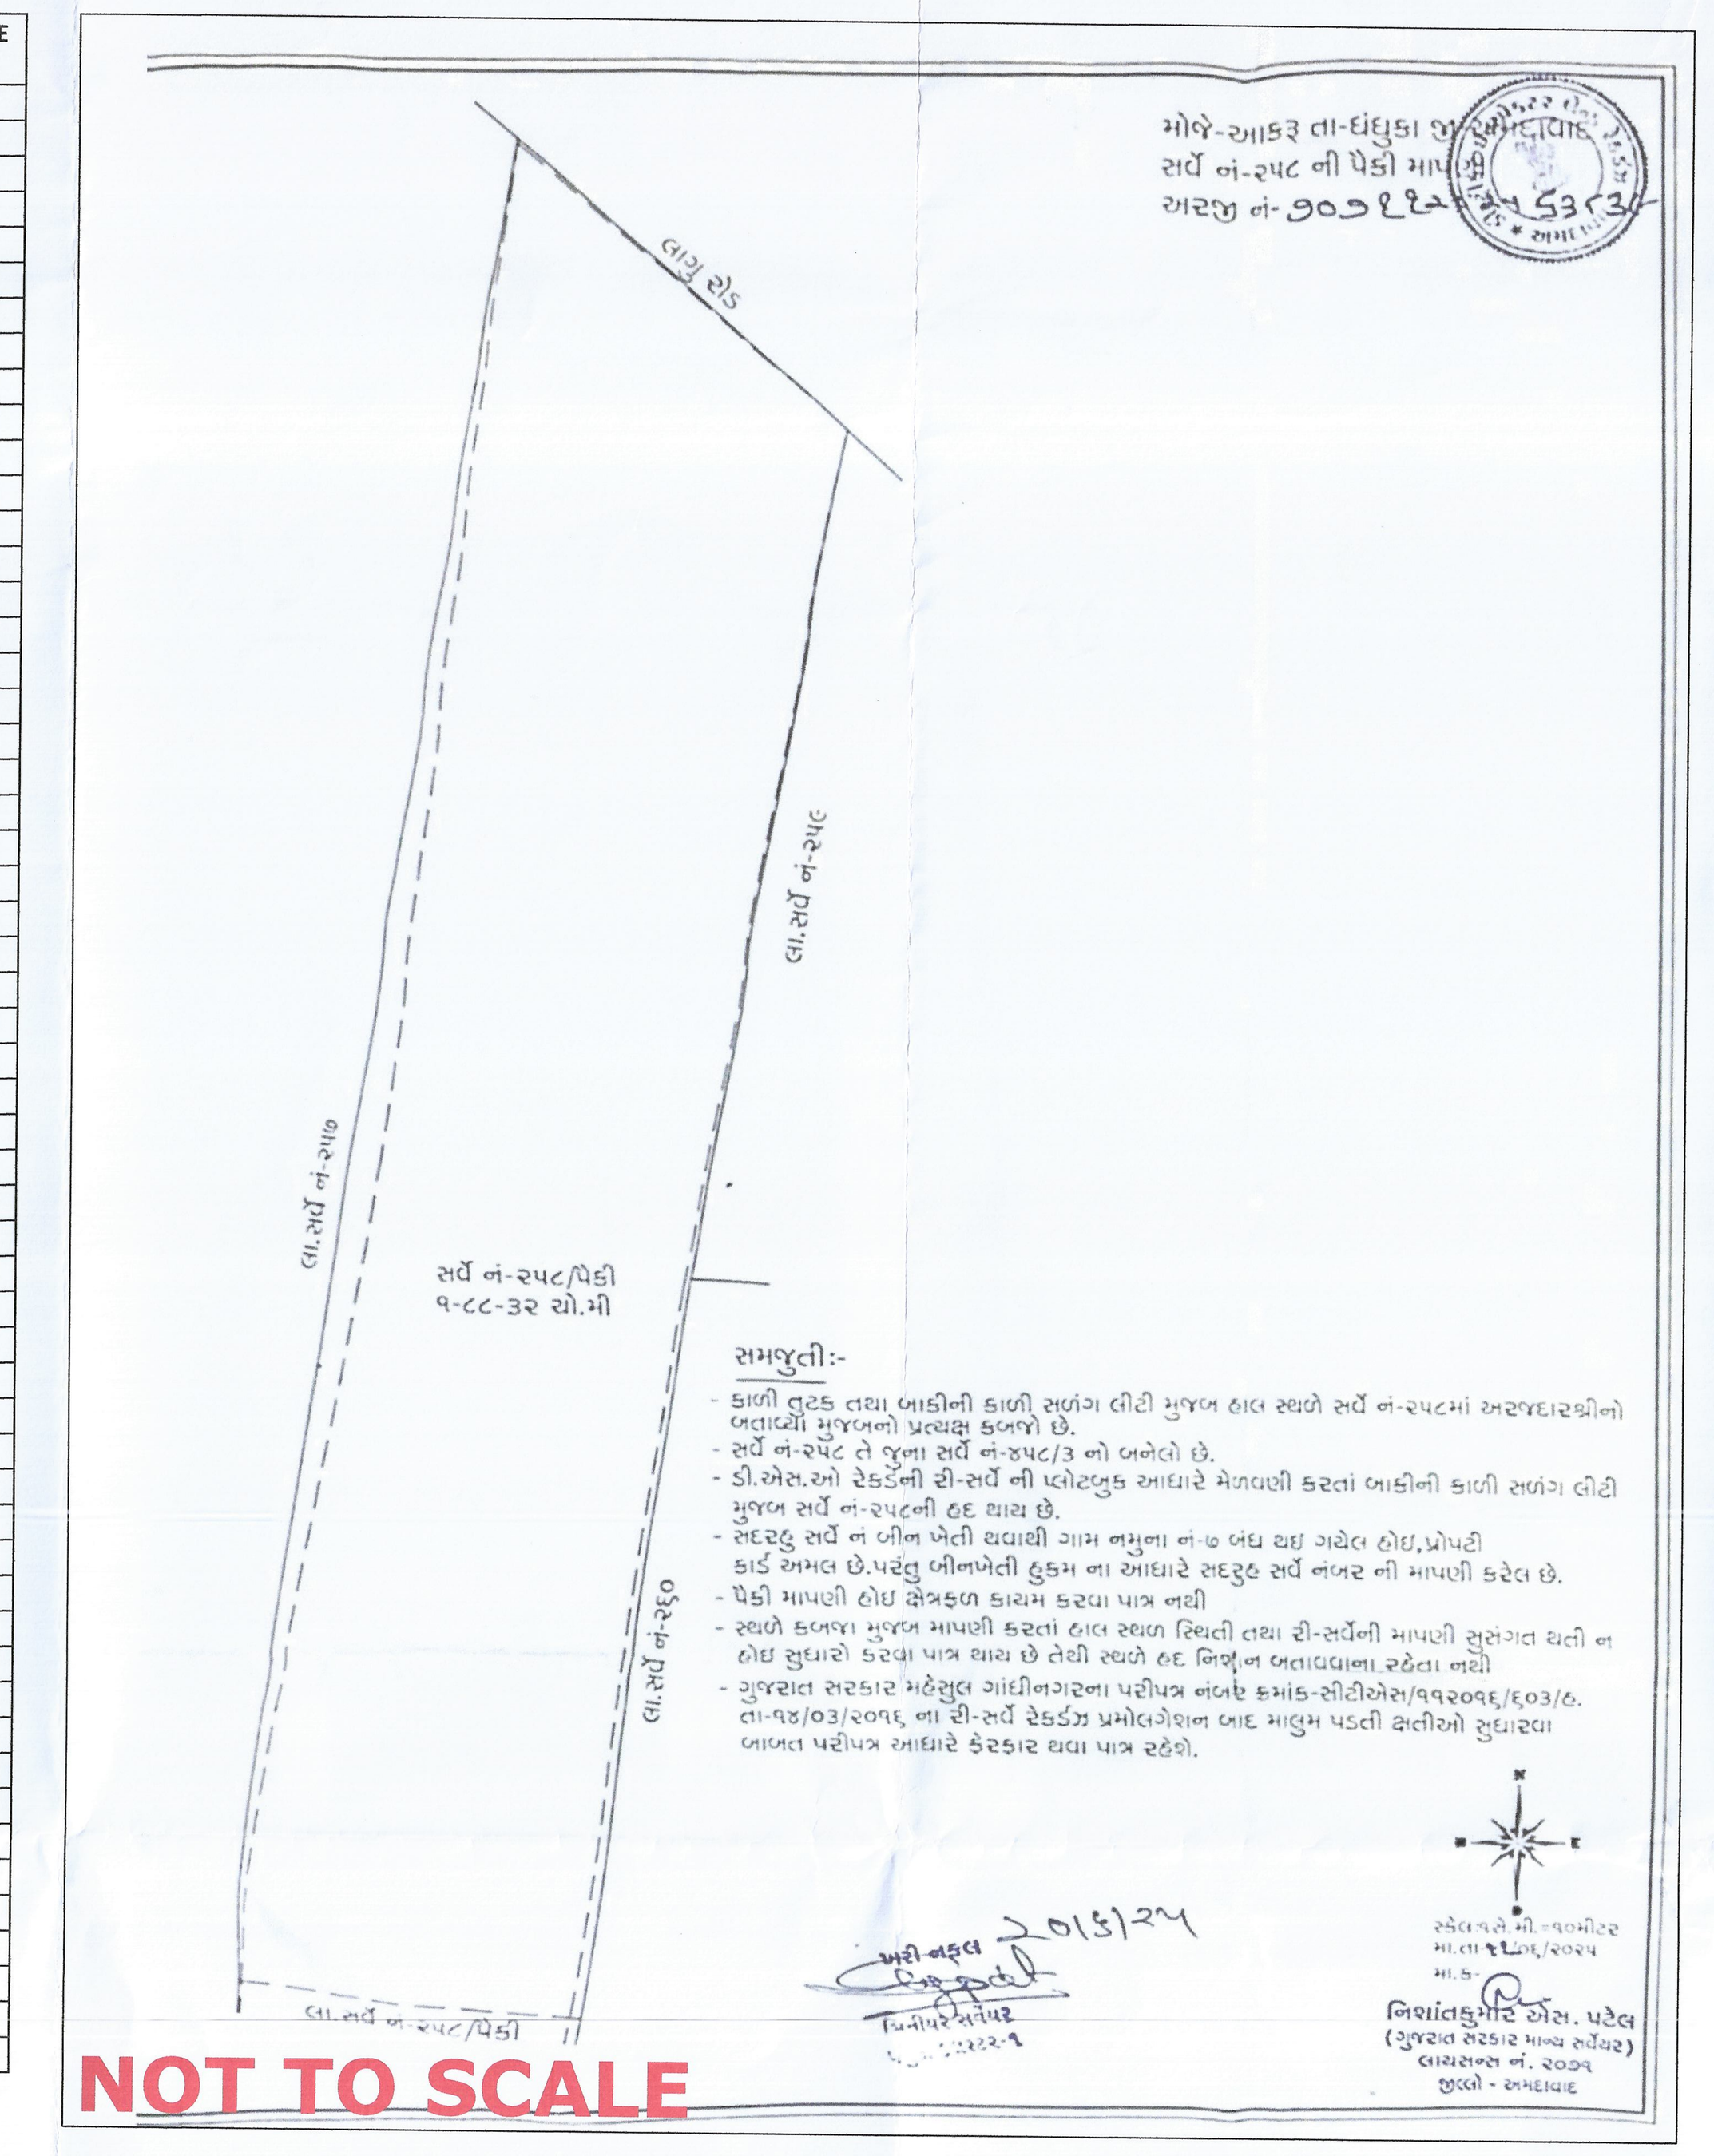

NOT TO SCALE

BUILDING PLAN (SCALE :- 1.0 CM = 1.0 MT)

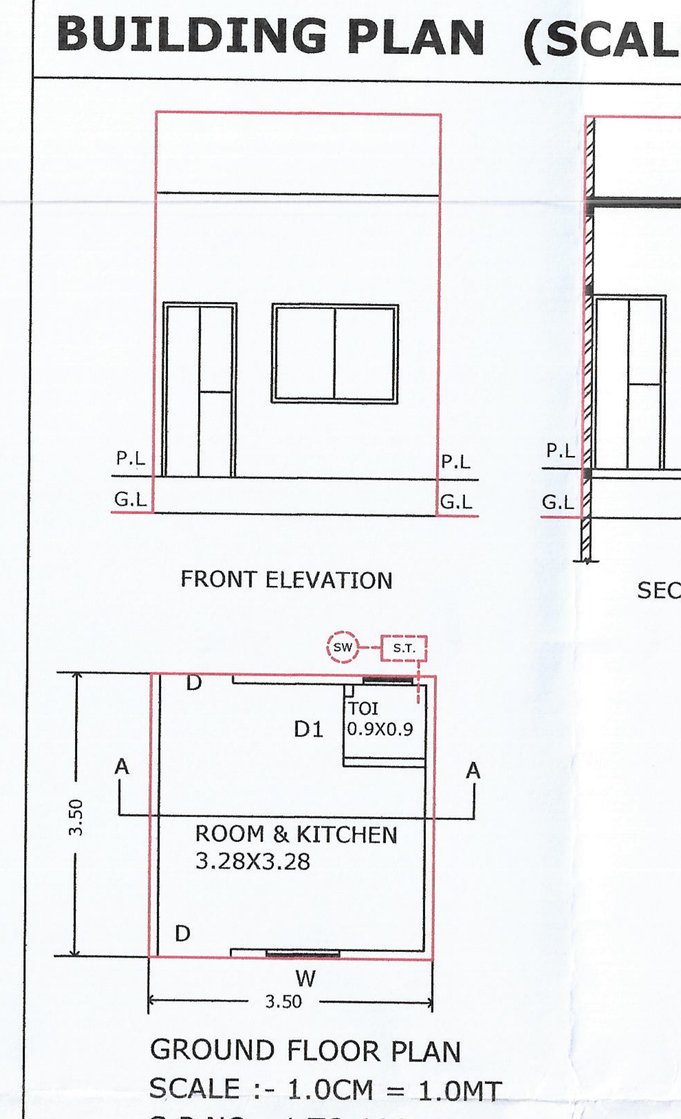

BUILTUP AREA CALCULATION (in sqmt)
SUB PLOT NO 1 TO 111
12.25 X 111 units = 1359.75 sqmt
GROUND FLOOR :-
03.50 X 03.50X 1 = 12.25 sqmt

DOOR / WINDOW SCHEDULE :-

SCHEDULE	SIZE
D DOOR	0.90 X 2.15
D1 DOOR	0.75 X 2.15
W WINDOW	1.20 X 1.55
W1 WINDOW	0.90 X 1.55
V VENT	0.60 X 0.90

SANITARY CALCULATION OF RESIDENTIAL

SEPTIK TANK

NO	NO OF USERS	REQUIRED	PROVIDED
1	5 X111 = 555	1.50X0.75X1	1.50X0.75X1
TOTAL PROVIDED SEPTIC TANK = 555			

SOAK WELL

NO	NO OF USERS	REQUIRED	PROVIDED
1	5 X 111 = 555	3.00 X 4.70	3.00 X 4.70
TOTAL PROVIDED SOAK WELL = 555			

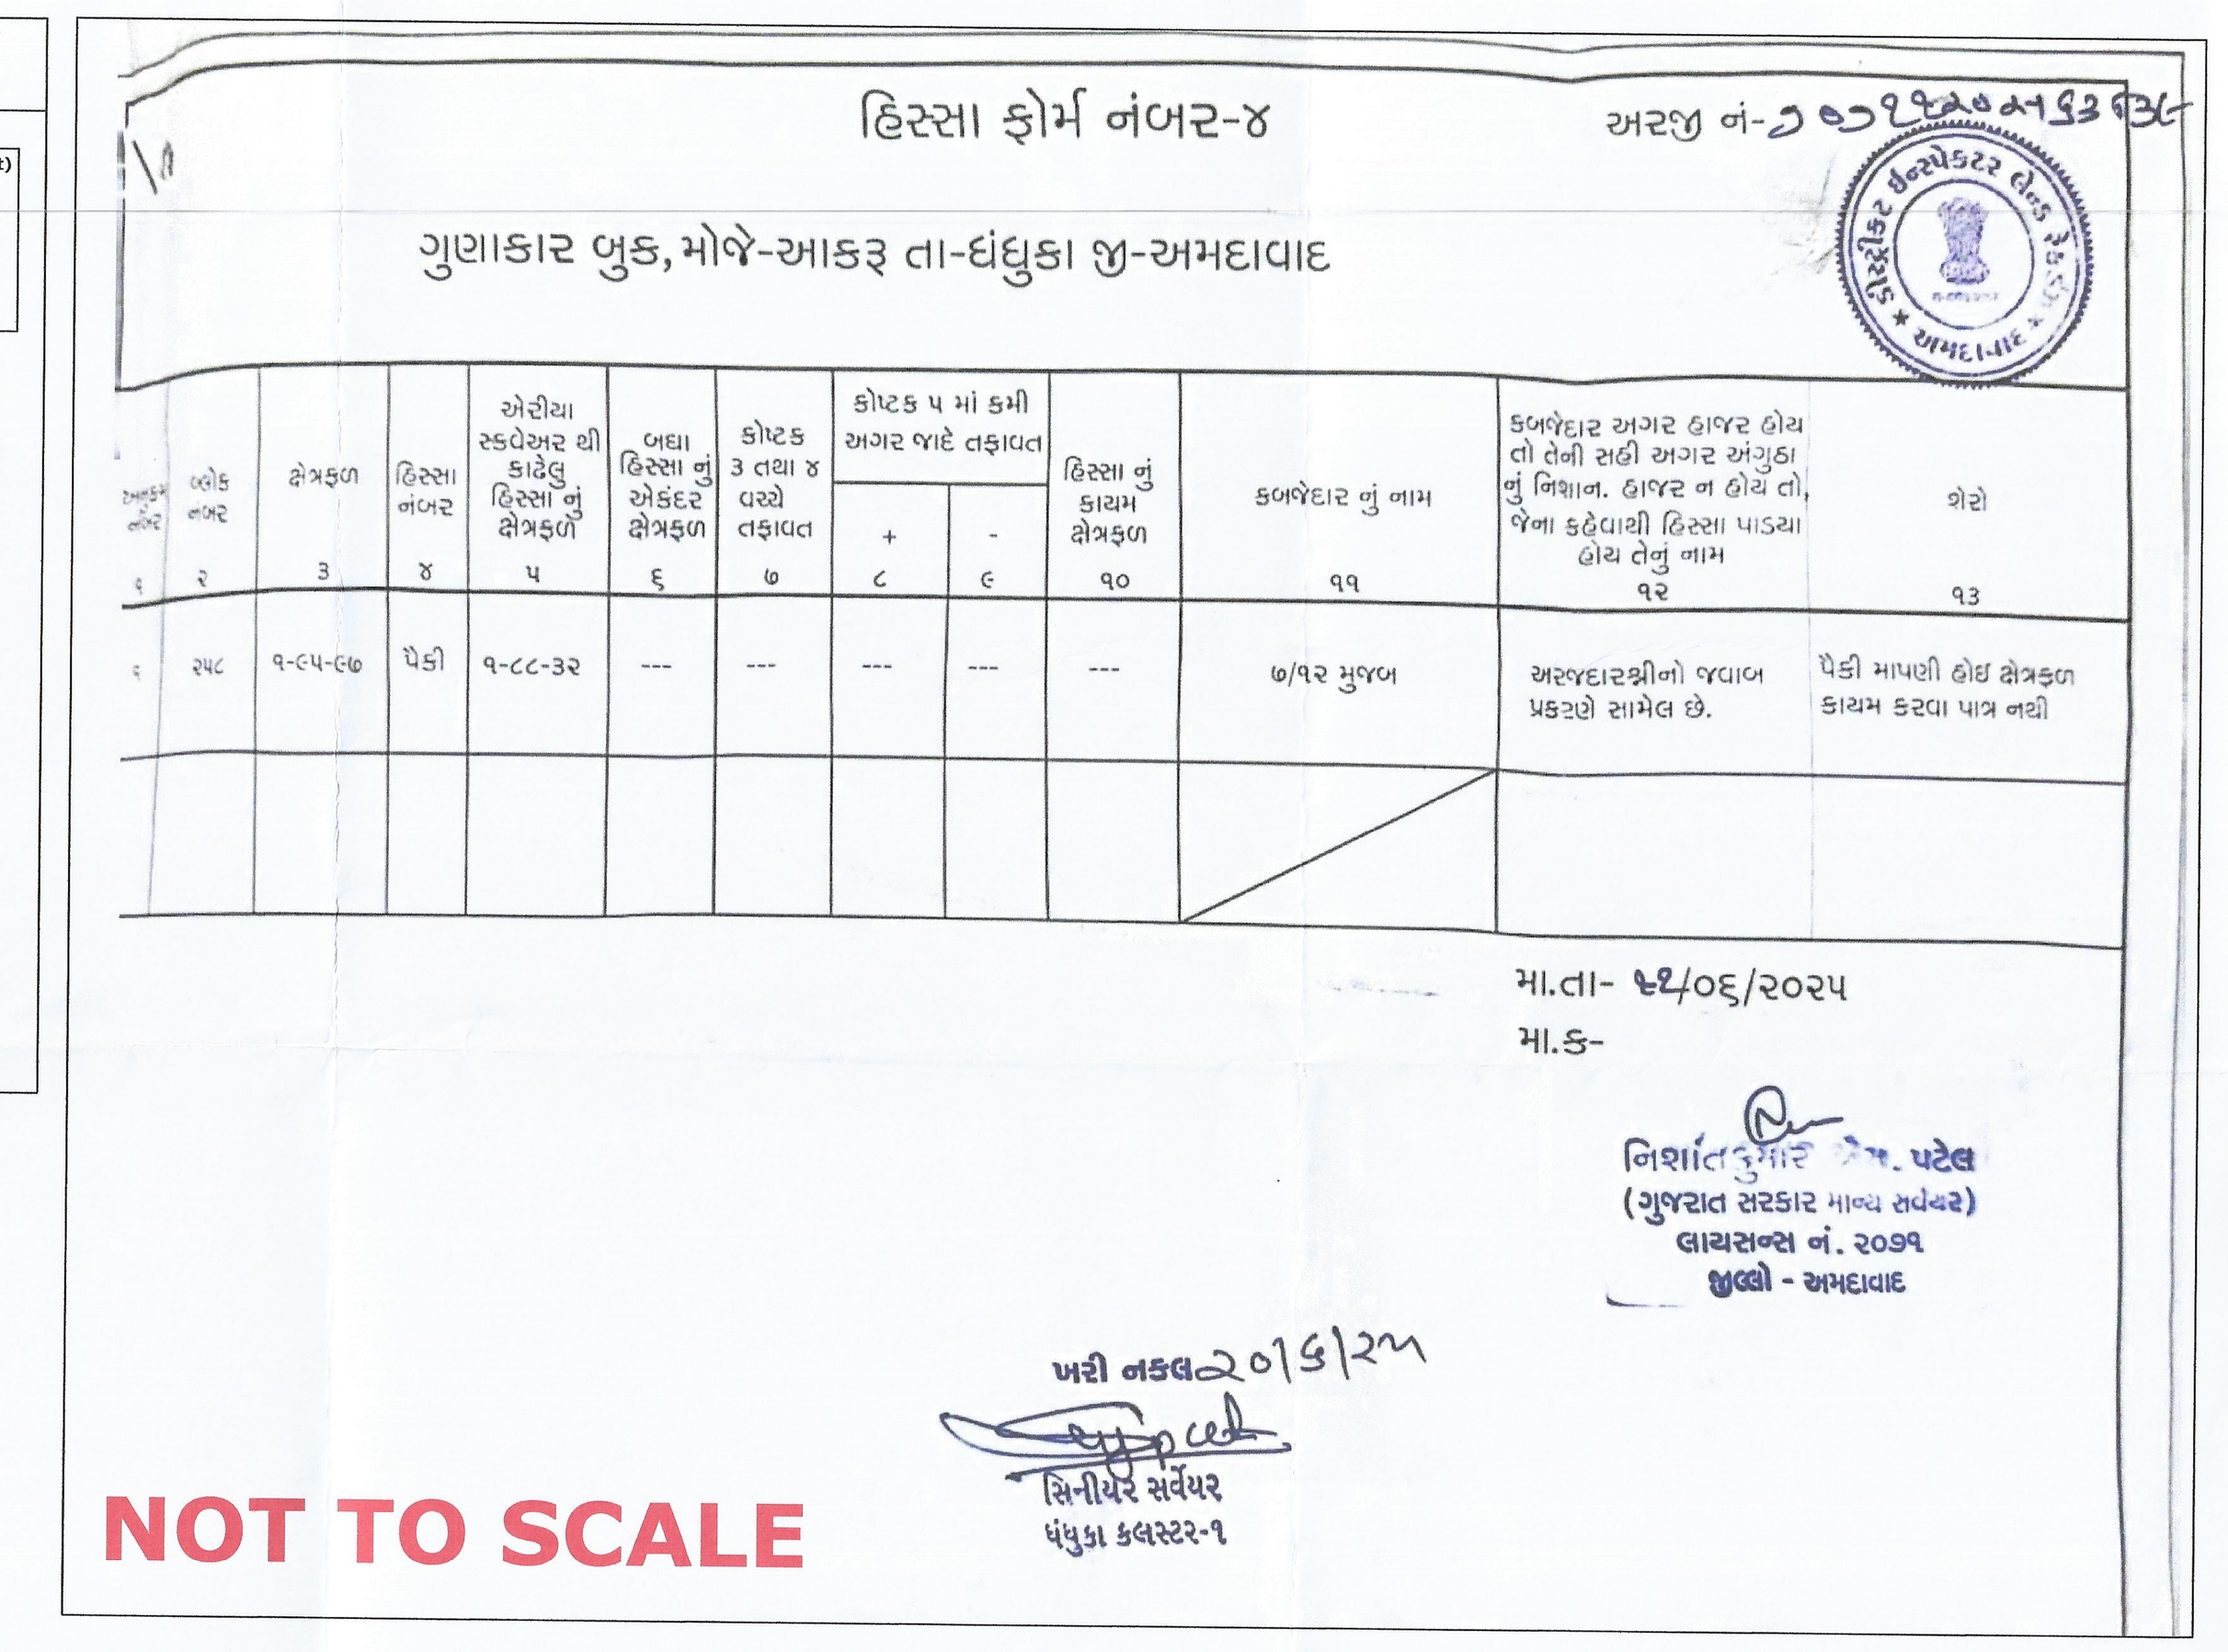

NOT TO SCALE

સવાલવાળી જમીનના માલીકી હક્ક, હિસ્સા, જેતે હક્કદાવા અન્વયેના વાદ-વિવાદ, સ્થળસ્થિતિની લોકેશન, હદોના માપો, ક્ષેત્રફળ તથા અન્ય તમામ મહેસૂલી બાબતોની ચકાસણી જેતે સંબંધિત સક્ષમ અધિકારીશ્રી દ્વારા કરાવ્યા બાદ યોગ્ય જણાય તો જ આગળની કાર્યવાહી કરવાની રહેશે

Owner is fully Responsible for Open Marginal Space D. P. OR T.P. Road, Allignment and Boundary of F.P. OR Sur. No. of the Lay-Out

અત્રે રજુ થયેલ પ્લાનમા સહી સિક્કા કરેલ સ્ટ્રકચરલ એન્જીનીયરશ્રી, આર્કિટેકટશ્રીના નામ પ્રોજેકટના સાહિત્ય/ પ્રોસરમાં તથા સ્થળે સાઈન બોર્ડ ઉપર દર્શાવવાના રહેશે.

AREA GOING IN ROAD CALCULATION :-
½ (02.11+02.14) X 75.93 = 161.35 sqmt

LAYOUT PLAN
SCALE :- 1.0 CM = 5.0 MT

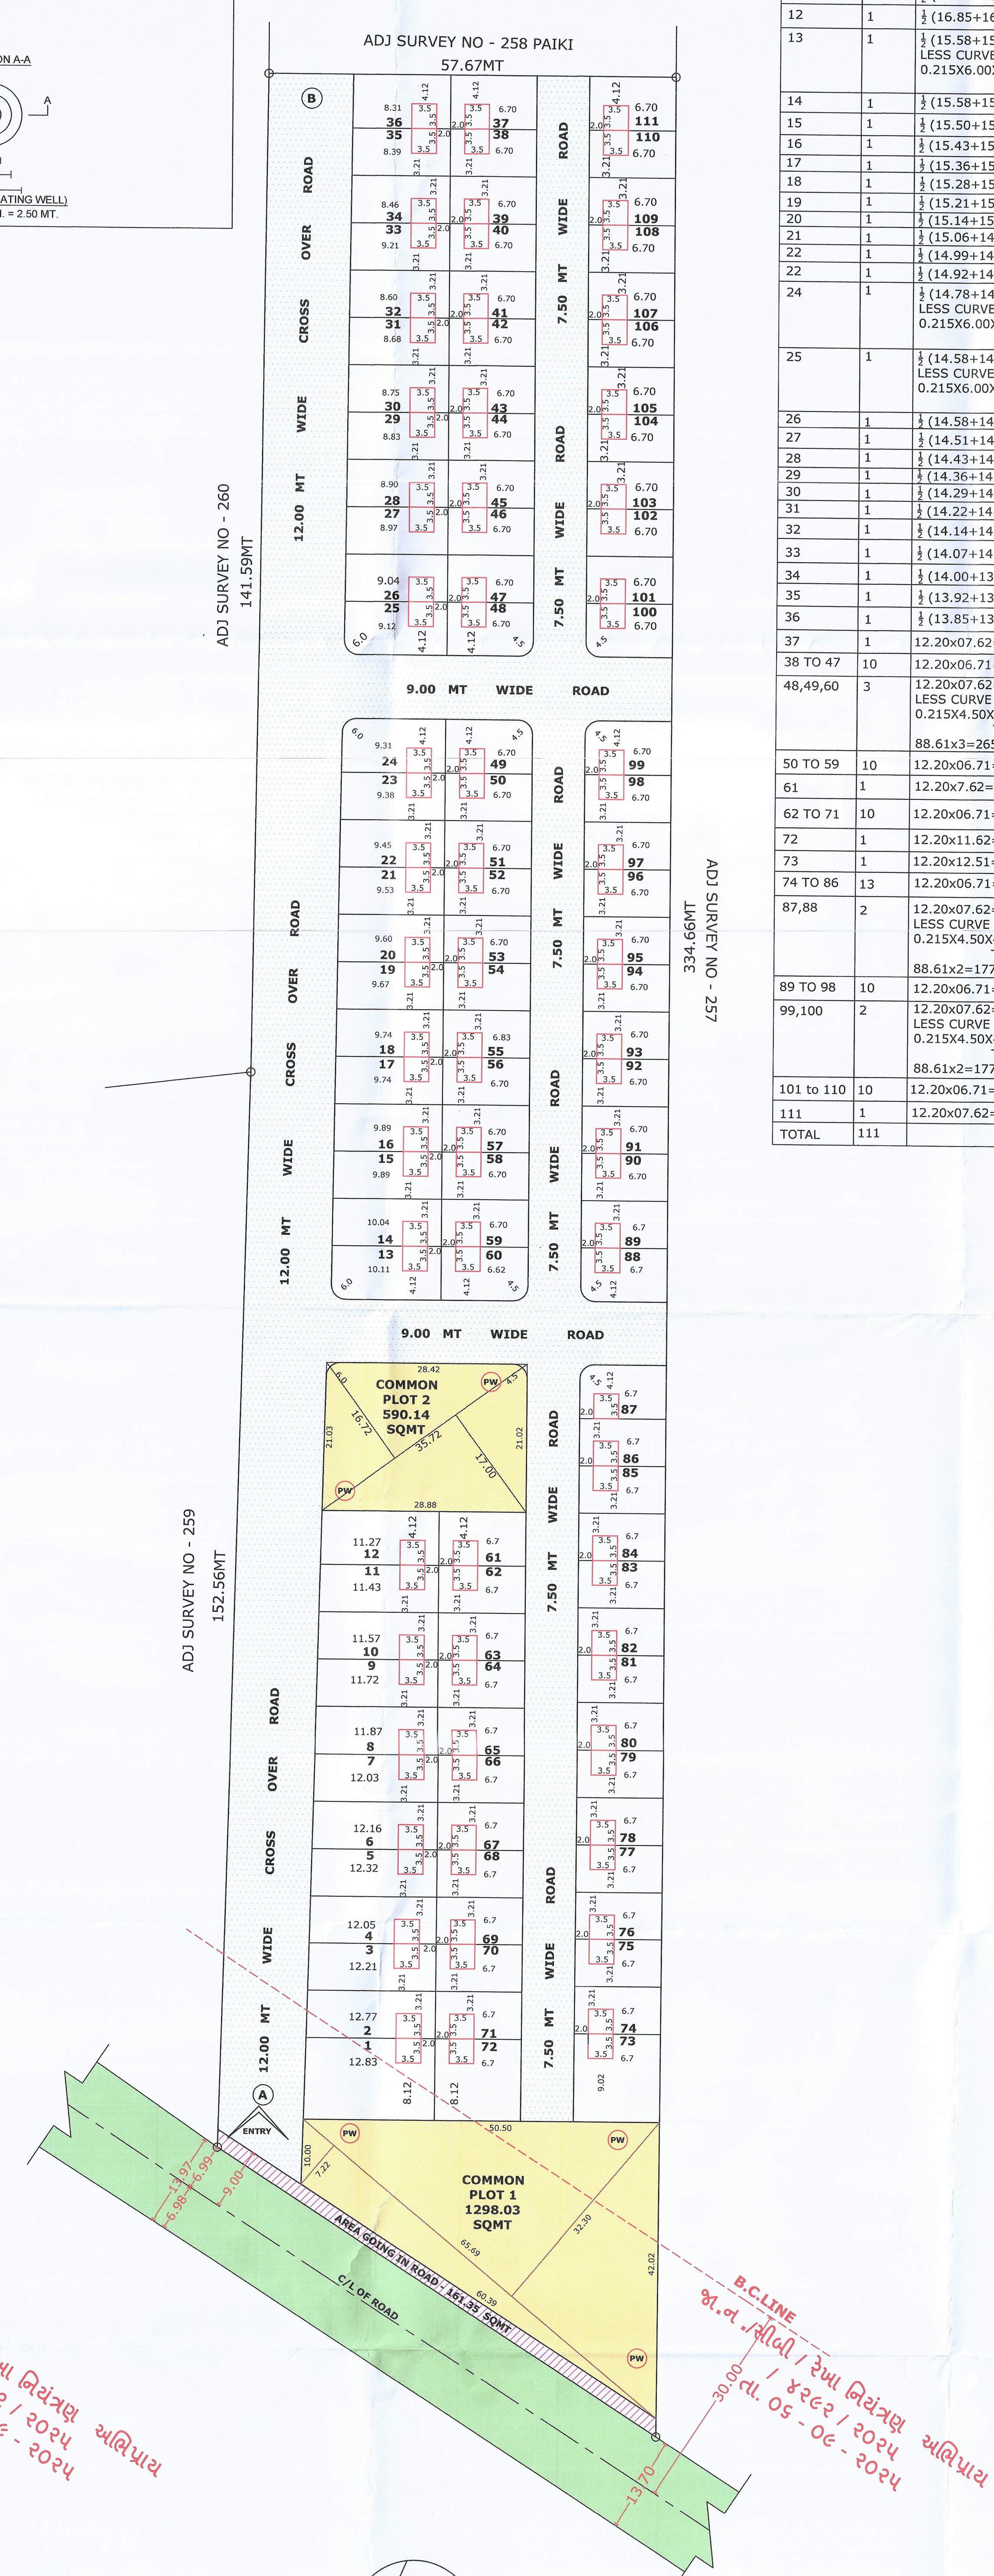

LAYOUT PLAN
SCALE :- 1.0 CM = 5.0 MT